
Datasheet

Application Server Websites, Dashboards, Applications

Securely share and control websites and applications on video walls across AV/IT networks

The VuWall Application Server is an appliance used for streaming, sharing, controlling, and visualizing websites, dashboards, and applications across networks. This appliance is available in a compact form-factor or a 1RU rack unit. The Application Server simplifies video wall deployments by providing quick access to websites, dashboards, and applications from a centralized source.

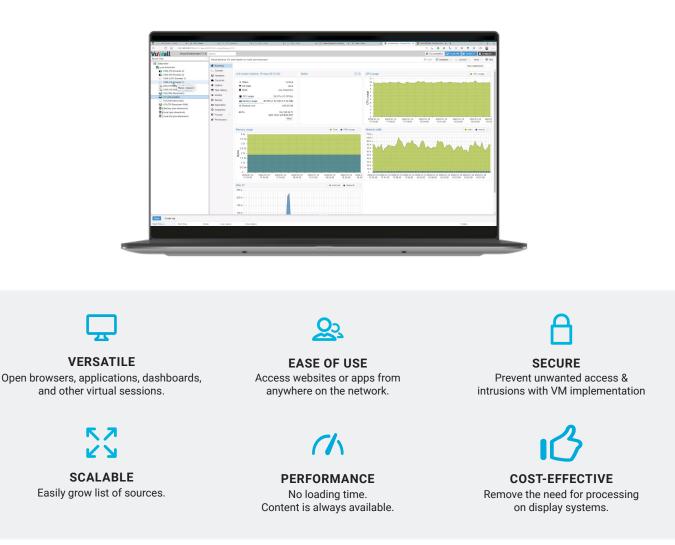

Need help? Talk to a video wall expert! Contact us at sales@vuwall.com

vuwall.com Control what you see.



Application Server Features & Benefits

Performance

The Application Server allows users to open a large number of websites, dashboards, and applications simultaneously. It also improves overall system performance by continously streaming content for quick access on the video walls.

Ease of Use

Users can easily access and interact with websites, dashboards, and applications from anywhere on the network. The Application Server also facilitates IT maintenance of certificates, licenses, plugins, etc.

Secure

By isolating websites and applications into a secure virtual machine architecture, unwanted access and intrusions are completely prevented.

Centralized Access


By centralizing websites and application deployments in a single appliance, not only are loading times negligeable, but processing power is alleviated from the video walls. This improves the overall performance of the video wall itself while benefiting from immediate access to websites, dashboards and applications that are residing on the centralized Application Server.

Multi-Platform Compatibility

The Application Server is platform-independant, making it possible to open applications and websites on any underlying Operating System, whether Windows or Linux.

Virtual Sessions

The Application Server provides independent virtual sessions where websites and applications run without affecting one another.

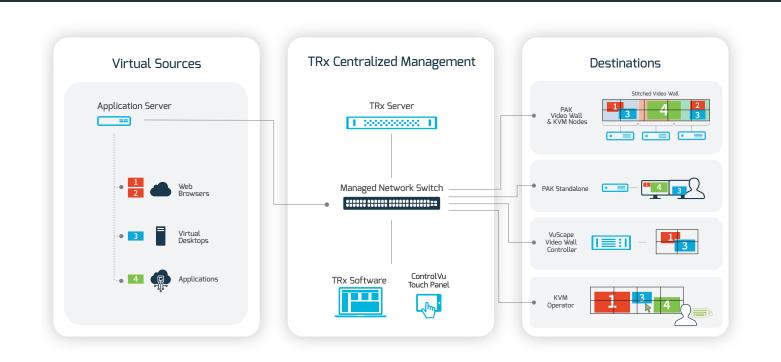

Workflow

Vu<mark>\//</mark>all

VuWall Application Server Technical Specifications

Cooling Fanned: active cooling Noise Level 36 dB Max. 61 dB (Depends on system config and room temperature of the system config an	Product Name	Application Server Mini	Application Server Redundant
Weight1.3 kg / 2.9 lbs10 kg / 2.2 lbsDimensions165 x 200 x 39.5 mm (WxDxH) 6 x 7.9 x 1.55' (WxDxH)437 x 503 x 43 mm (WxDxH) 17.2 x 19.85 x 1.7' (WxDxH)Power Consumption65W400WPower Supply120W adapter 1012 to 102 400 VAC, 50/60 Hz Output: 19V/4.74A DCRedundant 2 x 100 - 240 VACOperating ConditionsOperating temperature range: 0-40°C / 32-104°F Relative humidity, non-condensing: 10-90%Operating Temperature range: 5-35°C / 41-95°F Relative humidity, non-condensing: 10-90%Noise Level36 dBMax. 61 dB (Depends on system config and room temperature and a data data data data data data data	Part Number	VW-ApplicationServer-1	VW-ApplicationServer-1U-R-4
Dimensions $165 \times 200 \times 39.5 mm (WxDxH)$ $6 \times 7.9 \times 1.55' (WxDxH)$ $437 \times 503 \times 43 mm (WxDxH)$ $17.2 \times 19.85 \times 1.7'' (WxDxH)$ Power Consumption $65W$ $400W$ Power Consumption $65W$ $400W$ Power Supply $120W$ adapter Unput: 100-240 VAC, 50/60 Hz Output 19V/4.74A DCRedundant 2 \times 100 - 240 VACOperating ConditionsOperating temperature range: 0-40'C / 32-104'F Relative humidity, non-condensing: 10-90%Operating Temperature range: 5.35'C / 41-95'F Relative humidity, non-condensing: 10-90%CoolingFannet: active coolingMax. 61 dB (Depends on system config and room temperature (Depends on system config and room temperature and room temperatureNoise Level36 dBMax. 61 dB (Depends on system config and room temperature (Depends on system conf	Hardware		
Dimensions $6 \times 7.9 \times 1.55^{\circ}$ (WxDxH) $17.2 \times 19.85 \times 1.7^{\circ}$ (WxDxH)Power Consumption $65W$ $400W$ Power Supply $120W$ adapter Operating temperature range: $0.40^{\circ}C$ / $32\cdot104^{\circ}F$ Relative humidity, non-condensing: $10\cdot90\%$ Redundant $2 \times 100 \cdot 240$ VACOperating ConditionsOperating temperature range: $0.40^{\circ}C$ / $32\cdot104^{\circ}F$ Relative humidity, non-condensing: $10\cdot90\%$ Operating Temperature range: $5\cdot35^{\circ}C$ / $41\cdot95^{\circ}F$ Relative humidity, non-condensing: $10\cdot90\%$ CoolingFanned: $=$ V Noise Level $36 dB$ Max. 61 dB (Depends on system config and room temperature (Depends on system config and room temperature)Warranty $3 \times 3 \times$	Weight	1.3 kg / 2.9 lbs	10 kg / 22 lbs
Power Supply 120W adapter Input: 100-240 VAC, 50/60 Hz Output: 19V/4.74 AD C Redundant 2x 100 - 240 VAC Operating Conditions Operating temperature range: 0-40°C / 32-104°F Relative humidity, non-condensing: 10-90% Relative humidity, non-condensing: 10-90% Operating Temperature range: 5-35°C / 41-95°F Relative humidity, non-condensing: 10-90% Noise Level Fanned: active cooling Max. 61 dB (Depends on system config and room temperature warranty Noise Level 36 dB Max. 61 dB (Depends on system config and room temperature warranty Noise Level 36 dB Max. 61 dB (Depends on system config and room temperature warranty Network Interface Connectors and Standard 2 x RJ45, 1 GbE (each) IP Version IPv4 and IPv6 Perdomant VuWall virtual environment and VuWall TRx Capabilities Supported Formats Supported Formats Websites, dashboards, virtual desktops (Only low refresh rate (less than 30 Hz) per stream - performance may vary depending on the requirements of the websites applications and virtual desktops Performance Conduct kit available to mount 2 x Application	Dimensions		
Power Supply Input: 100-240 VAC, 50/60 Hz Description Operating Conditions Operating temperature range: 0.40°C / 32-104°F Relative humidity, non-condensing: 10-90% Operating Temperature range: 5-35°C / 41-95°F Relative humidity, non-condensing: 10-90% Noise Level 36 dB Max. 61 dB (Depends on system config and room temperature waranty Network Interface Max. 61 dB (Depends on system config and room temperature and config and room temperature waranty Network Interface Image: Connectors and Standard Connectors and Standard 2 x RJ45, 1 GbE (each) IP Version IPV4 and IPV6 Software Image: Config and room temperature waranty Supported Formats Websites, dashboards, virtual desktops Supported Formats Websites, dashboards, virtual desktops Performance 0010/V/F and DV/AK websites in HD or 4 vebsites in AK or (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the websit applications an virtual desktops Mounting Hardware Rackmount kit available to mount 2 x Application	Power Consumption	65W	400W
Operating Conditions Relative humidity, non-condensing: 10-90% Relative humidity, non-condensing: Humidity: 10-90 Cooling Fanned: active cooling Noise Level 36 dB Max. 61 dB (Depends on system config and room temperature) Warranty 3 years Network Interface Connectors and Standard Connectors and Standard 2 x RJ45, 1 GbE (each) IP Version IPv4 and IPv6 Software Management Management VuWall virtual environment and VuWall TRx Capabilities Up to 16 websites in HD or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 websites in 4L or 4 websites in 4K or combination of HD/4K websites in 4L or 4 website	Power Supply	Input: 100-240 VAC, 50/60 Hz	
Noise Level 36 dB Max. 61 dB (Depends on system config and room temperature Warranty Warranty 3 years Network Interface Connectors and Standard Connectors and Standard 2 x RJ45, 1 GbE (each) IP Version IPv4 and IPv6 IP Addressing Static IP (Default) and DHCP Software Management Management VuWall virtual environment and VuWall TRx Capabilities Up to 16 websites in HD or 4 websites in 4K or combination of HJ/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream - performance may vary depending on the requirements of the websit applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Operating Conditions		Operating Temperature range: 5-35°C / 41-95°F Relative humidity, non-condensing: Humidity: 10-90%
Noise Level 36 dB (Depends on system config and room temperature Warranty 3 years Network Interface Image: Connectors and Standard Connectors and Standard 2 x RJ45, 1 GbE (each) IP Version IPV4 and IPv6 IP Addressing Static IP (Default) and DHCP Software Image: Connectors and YuWall Virtual environment and YuWall TRx Capabilities Image: Connectors YuWall Virtual environment and YuWall TRx Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance Up to 16 websites in HD or 4 websites in Af or combination of HD/V4K websites in 4K or (Only low refresh rate (less than 30 Hz) per stream - performance may vary depending on the requirements of the websi applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Cooling	Fanned: active cooling	
Network Interface Connectors and Standard 2 x RJ45, 1 GbE (each) IP Version IPv4 and IPv6 IP Addressing Static IP (Default) and DHCP Software Management Management VuWall virtual environment and VuWall TRx Capabilities Supported Formats Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the website applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Noise Level	36 dB	Max. 61 dB (Depends on system config and room temperature)
Connectors and Standard 2 x RJ45, 1 GbE (each) IP Version IPv4 and IPv6 IP Addressing Static IP (Default) and DHCP Software Management Management VuWall virtual environment and VuWall TRx Capabilities Supported Formats Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the website applications and virtual desktops Mounting Hardware Rackmount kit available to mount 2 x Application	Warranty		
IP Version IP v4 and IP v6 IP Addressing Static IP (Default) and DHCP Software Image and the environment and VuWall TRx Management VuWall virtual environment and VuWall TRx Capabilities Image and the environment and VuWall TRx Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance Up to 16 websites in HD or 4 websites in 4K or combination of HD/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the website applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Network Interface		
IP Addressing Static IP (Default) and DHCP Software Management Management VuWall virtual environment and VuWall TRx Capabilities Supported Formats Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance Up to 16 websites in HD or 4 websites in 4K or combination of HD/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the website applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Connectors and Standard	2 x RJ45, 1 GbE (each)	
Software VuWall virtual environment and VuWall TRx Management VuWall virtual environment and VuWall TRx Capabilities Supported Formats Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance Up to 16 websites in HD or 4 websites in 4K or combination of HD/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the website applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	IP Version	IPv4 and IPv6	
Management VuWall virtual environment and VuWall TRx Capabilities Supported Formats Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance Up to 16 websites in HD or 4 websites in 4K or combination of HD/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the websit applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	IP Addressing	Static IP (Default) and DHCP	
Capabilities Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance Up to 16 websites in HD or 4 websites in 4K or combination of HD/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the website applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Software		
Supported Formats Websites, dashboards, virtual desktops (Linux, Windows), applications Performance Up to 16 websites in HD or 4 websites in 4K or combination of HD/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the website applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Management	VuWall virtual environment and VuWall TRx	
Up to 16 websites in HD or 4 websites in 4K or Performance (Only low refresh rate (less than 30 Hz) per stream - performance may vary depending on the requirements of the website applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Capabilities		
Performance 4 websites in 4K or combination of HD/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the website applications and virtual desktop) Mounting Hardware Rackmount kit available to mount 2 x Application	Supported Formats	Websites, dashboards, virtual desktops (Linux, Windows), applications	
Rackmount kit available to mount 2 x Application	Performance	4 websites in 4K or combination of HD/4K websites + 1-2 virtual desktops (Only low refresh rate (less than 30 Hz) per stream – performance may vary depending on the requirements of the websites,	
	Mounting Hardware		
PAK-Rack-Mounting-Plate)	Rackmount	Servers (sold seperately – part number:	Yes. By design



Application Server Redundant - Back


Contact Information

CORPORATE HQ

VuWall Technology Inc. 181 Hymus Blvd., Suite 301 Montreal, Quebec H9R 5P4, Canada +1 514 505 4436 EUROPEAN HQ VuWall Technology Europe GmbH Birnenweg 15 72766 Reutlingen Germany +49 7121 766620

Application Server Mini - Back

US OFFICE VuWall USA Inc. 2662 Holcomb Bridge Road Suite 326 Roswell, GA, 30076 USA (844) 933 9255







Control what you see. www.vuwall.com sales@vuwall.com